


1	2	BRTN17WSS5PC Technical Specifications
---	---	---------------------------------------

Power source (KVA)	Power Supply (V)	Recommended IMM (T)	Traverser Stroke	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (MPa)	Air consumption (N-l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight (Kg)
4.2	220	600-1300	AC servo motor	2500	1430	1700	211	20	15.54	5.21	Single arms and telescopic type	4 suction 2 fixtures	C axis: 180° A axis: 360°	0.5-0.6	15	±0.05	3495*2297*1904.5	790
transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
1000w	750W 1: 9	30mm	gear rack-: 24mm	750W	750W*2 1:9	25mm	gear rack: 24mm	\	1000W	750W 1:15	20mm 15mm	Belt:20mm gear rack: 20mm	32-900	\	\	\	\	\

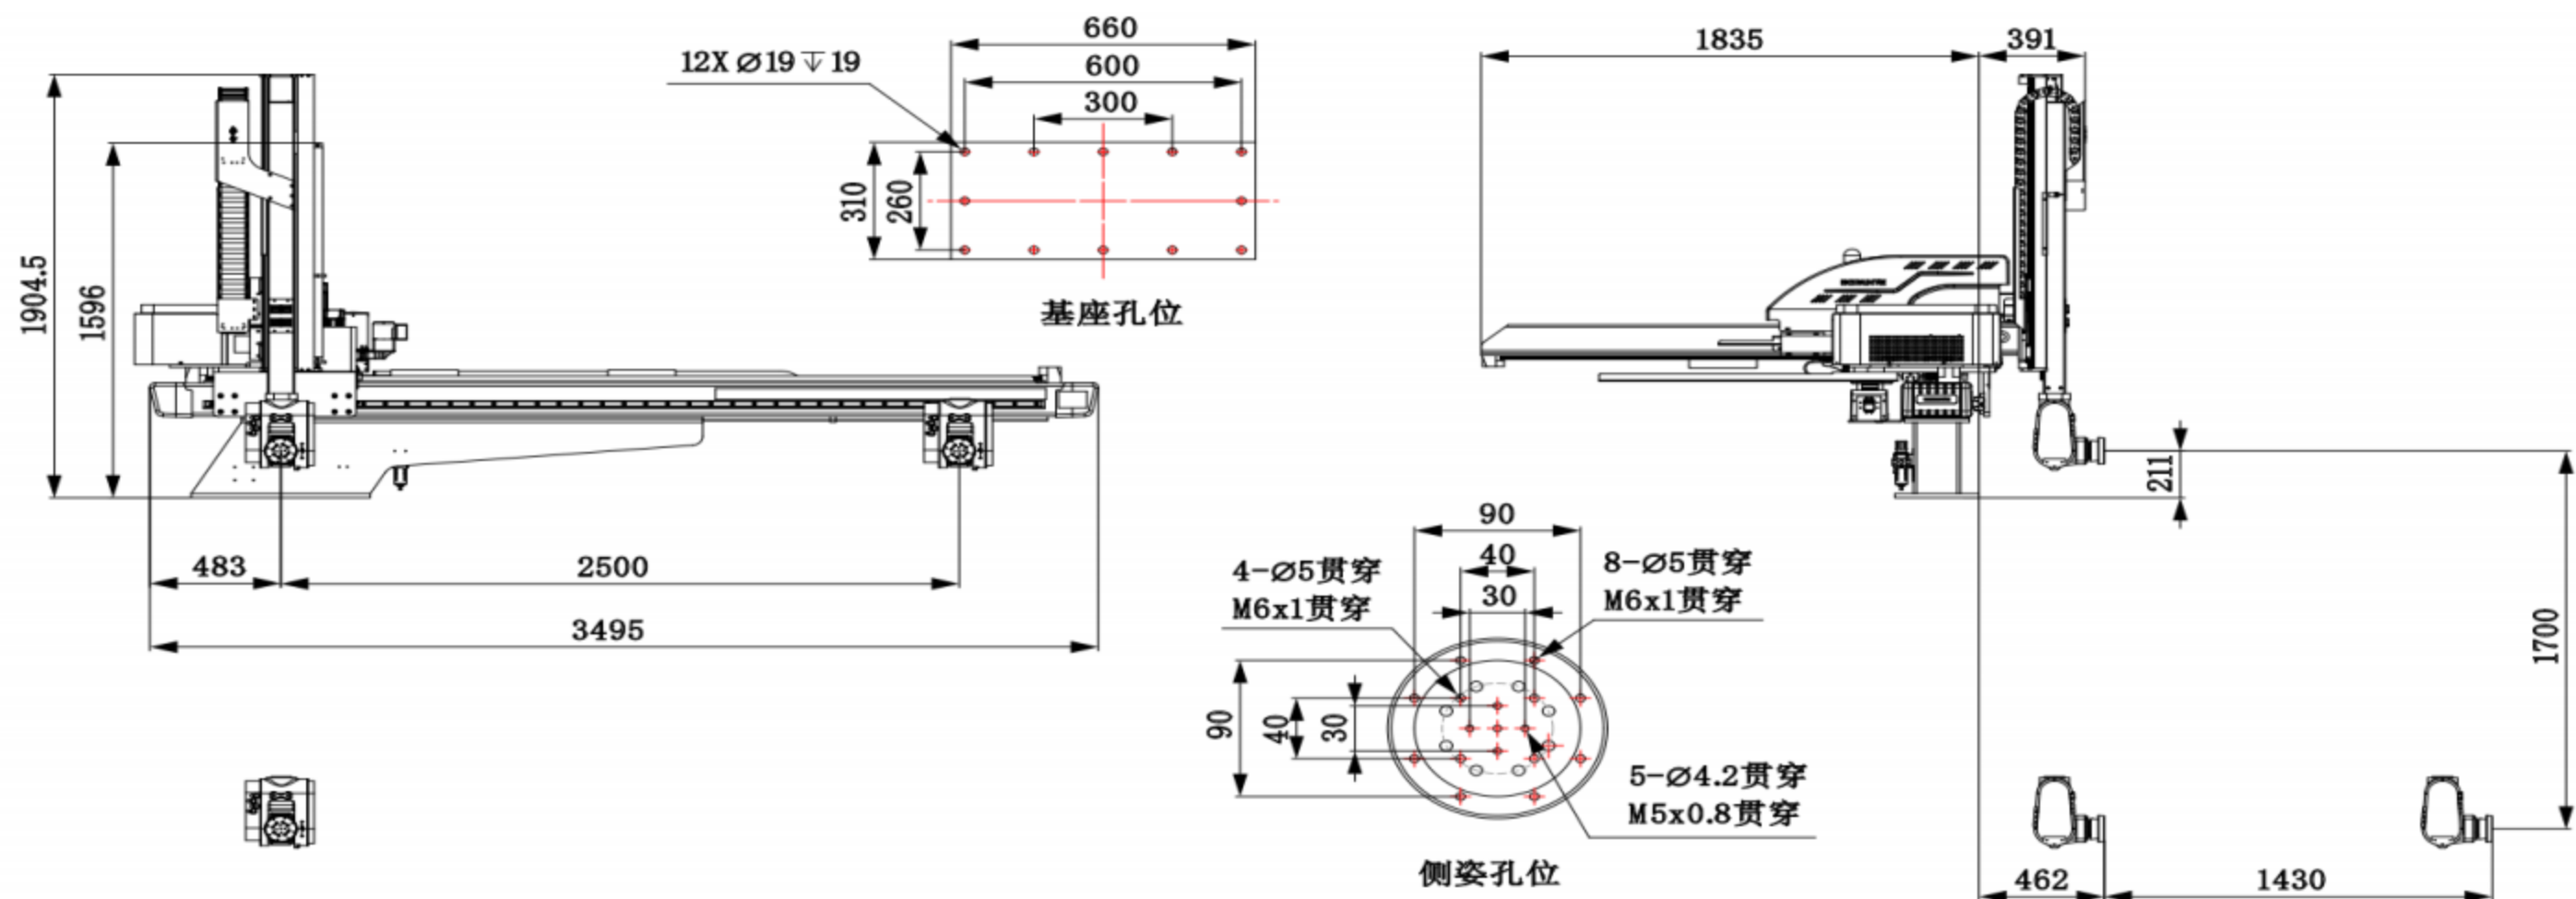

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding